

**UpRight**  
**SL26/30SL**

# speed level

articulated vertical lifts

Working heights  
to 10m (32ft.) and  
11m (36ft.)

Fast platform leveling  
on most uneven  
slopes or ground

Rough terrain features  
include 4WD, oscillating  
front axle, flotation tyres

19° (35%) + gradeability

Proportional drive/lift  
controls for smooth  
precise operation

Diesel power

Five year  
structural warranty



specifications	SL26SL	SL30SL
working height A	10m. (32ft.)*	11m. (36ft.)*
platform height B	8m. (26ft.)	9m. (30ft.)
max. drive height	8m. (26ft.)	9.1m. (30ft.)
platform capacity (max.)	680kg. (1,500lbs.)	590kg. (1,300lbs.)
platform size (inside)	1.72m. x 3.66m. (67.5in. x 144in.)	1.72m. x 4.23m. (67.5in. x 166.25in.)
weight - diesel	2,853kg. (6,290lbs.)	2,967kg. (6,540lbs.)
stowed height E	2.60m. (102.5in.)	2.60m. (102.5in.)
length D	3.79m. (149in.)	4.39m. (173in.)
width C	2.13m. (84in.)	2.13m. (84in.)
wheelbase	2.54m. (100in.)	2.54m. (100in.)
drive speed -max. with platform raised	5.0km/h. (3.1mph.) 0.8km/h. (0.5mph.)	5.0km/h. (3.1mph.) 0.8km/h. (0.5mph.)
gradeability	19 degrees (35%)	19 degrees (35%)
axle ground clearance	200mm. (7.75in.)	200mm. (7.75in.)
chassis ground clearance	320mm. (12.5in)	320mm. (12.5in)
inside turning radius	3.9 m (13 ft.)	3.9 m (13 ft.)
lift speed - raise/lower	21 / 32seconds	24 / 36seconds
toeboards	152mm. (6 in.)	152mm. (6 in.)
guardrails folded w/gate	1.1m. (43.5in.)	1.1m. (43.5in.)
control system	proportional, single axis controller with thumb rocker steering, levelling control: two toggle switches and bubble level (inoperable above interlock height)	
platform levelling	13° to either side; 9° fore, 9° aft	
drive system	four wheel with hydraulic motors	
power source	22hp Kubota diesel, water cooled engine	
tyres	26 x 12.00 - 12 NHS Super Terra-grip with Trac Seal	
parking brake	spring-applied/hydraulically-released, multiple disc	


\* Metric working height is 2m. above platform height. Working height in the U.S. is 6ft. above platform height. Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment.

## standard features

Diesel  
 Speed Level -  
 powered platform levelling  
 Oscillating front axle  
 Dual multi-disc brakes  
 One-hand, proportional controls  
 Wired for AC outlet on platform  
 Fold-down guardrails  
 Descent alarm/hour meter  
 1 year parts/service  
 5 year structural warranty

## options

2000 watt/110V  
 AC generator  
 All motion alarm  
 Flashing amber  
 beacon and horn  
 Poly-fill for RT tyres  
 Diesel exhaust scrubber  
 Special paint colours  
 Environmental green oil

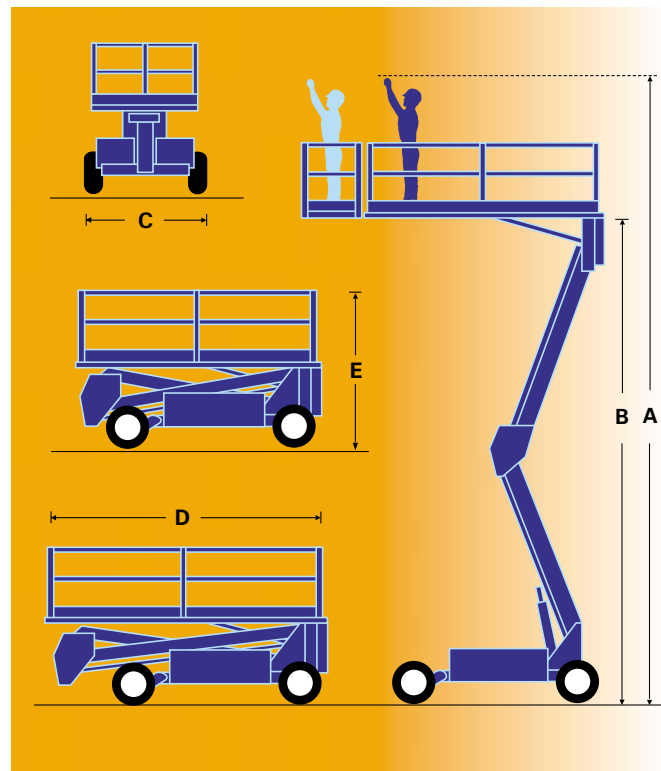

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.

**CE** This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by  
**UpRight**



*The Speed Level allows fast platform levelling on slopes and uneven ground.*



*All models have oscillating axles to keep drive wheels in contact with uneven ground and have high levels of gradeability for tough sites and loading ramps.*

**UpRight**

GLOBAL PROVIDER OF ACCESS SOLUTIONS

